


Tappo di chiusura Verschlussdeckel zum Eindrücken

DIN 443 TYPE B (CYLINDRICAL)

STEEL DC 03 EN 10139

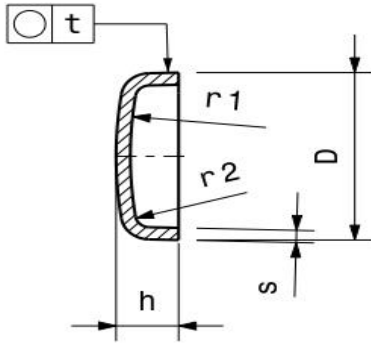

DIMENSIONS AND FEATURES							PACKAGING	
D min.-max.	h min.-max.	r1	r2	s min.-max.	t	Kg/1000 pieces	No. of pcs standard packaging	No. of pcs bulk packaging
8.10-8.15	2.70-3.30	20	1	0.60-0.90	0.05	0.460		18000
10.10-10.15	2.70-3.30	25	1	0.60-0.90	0.05	0.700		14000
12.13-12.20	3.63-4.37	30	1	0.85-1.15	0.05	1.430		6000
14.13-14.20	4.63-5.37	35	1	0.85-1.15	0.05	2.130		4500
15.15-15.22	4.63-5.37	38	1	0.85-1.15	0.05	2.370		4000
16.15-16.22	4.63-5.37	40	1	0.85-1.15	0.05	2.620		3750
18.15-18.22	5.63-6.37	45	1	0.85-1.15	0.05	3.320		2750
20.19-20.27	5.63-6.37	50	1	0.85-1.15	0.05	4.160		2500
22.19-22.27	6.55-7.45	55	1.6	1.45-1.75	0.05	7.250		1250
24.19-24.27	6.55-7.45	60	1.6	1.45-1.75	0.05	8.860		1000
25.22-25.30	7.55-8.45	60	1.6	1.45-1.75	0.05	9.600		900
28.22-28.30	8.55-9.45	70	1.6	1.45-1.75	0.05	13.320		750
30.22-30.30	8.55-9.45	75	1.6	1.45-1.75	0.05	14.790		650
36.28-36.37	10.45-11.55	90	1.6	1.45-1.75	0.06	22.230		450
40.28-40.37	11.45-12.55	100	1.6	1.45-1.75	0.06	27.530		350
42.33-42.42	12.45-13.55	105	1.6	1.45-1.75	0.06	31.160		320
45.33-45.42	13.45-14.55	110	1.6	1.45-1.75	0.06	36.130		250
50.33-50.42	14.45-15.55	125	1.6	1.45-1.75	0.06	44.180		200
56.41-56.52	16.45-17.55	140	2.5	1.85-2.15	0.08	68.570		150
63.41-63.52	18.35-19.65	160	2.5	1.85-2.15	0.08	87.720		100

Dimensions in mm

Technical details:

Chemical analysis of raw material:
see table.

Anticorrosion surface covering:

Burnishing and light oiling.
Electrozinc plating 6-8 cr6 free.
Other finishings by request.

Features and specific use:

Sealing push-in caps are used in several industrial applications when holes have to be sealed in order to prevent the entry of foreign parts and liquids.