


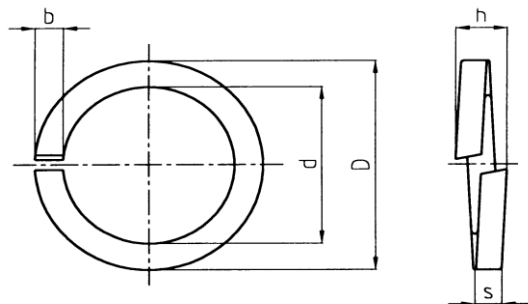

DIMENSIONS AND FEATURES							PACKAGING		
For screws of	d min.-max.	D max.	b min.-max.	s min.-max.	h min.-max.	Kg/1000 pieces	No. of pcs standard packaging	No. of pcs bulk packaging	No. of pcs micro packaging
M 3.0	3.50-3.98	6.38	0.80-1.20	0.80-1.20	1.80-2.15	0.120	2000	80000	500
M 4.0	4.50-4.98	7.38	0.80-1.20	0.80-1.20	1.80-2.15	0.146	2000	40000	200
M 5.0	5.50-5.98	9.38	1.30-1.70	1.30-1.70	2.80-3.30	0.285	1000	30000	200
M 6.0	6.50-7.08	11.48	1.80-2.20	1.80-2.20	3.80-4.55	0.791	1000	13000	200
M 8.0	8.50-9.08	14.48	2.30-2.70	2.30-2.70	4.70-5.55	1.535	1000	6500	100
M 10.0	10.50-11.20	17.60	2.80-3.20	2.80-3.20	5.60-6.60	2.640	1000	3000	100
M 12.0	13.00-13.70	21.18	3.26-3.74	3.26-3.74	6.60-7.80	5.000	500	2000	100
M 14.0	15.00-15.70	24.18	3.76-4.24	3.76-4.24	7.60-8.90	7.390	500	1250	50
M 16.0	17.00-17.70	26.18	3.76-4.24	3.76-4.24	7.60-8.90	7.830	250	1000	50
M 18.0	19.00-19.84	30.32	4.76-5.24	4.76-5.24	9.60-11.20	13.400	250	600	
M 20.0	21.00-21.84	32.32	4.76-5.24	4.76-5.24	9.60-11.20	15.440	200	500	
M 22.0	23.00-23.84	34.32	4.76-5.24	4.76-5.24	9.60-11.20	15.700	200	400	
M 24.0	25.00-25.84	38.32	5.76-6.24	5.76-6.24	11.60-13.80	26.000	100	250	

Dimensions in mm

Technical details:

Hardness: 440 - 510 Hv.

Tightening torques: see table.

Chemical analysis of raw material: see table.

Anticorrosion surface treatment:

Burnishing and light oiling.

White mech. zinc plating 12my Cr6 free.

Yellow mech. zinc plating 12my Cr6 free.

Delta Protekt® KL 100 6-10 my.

Geomet® 321 type A 5-7 my.

Other coatings upon customer request.

