


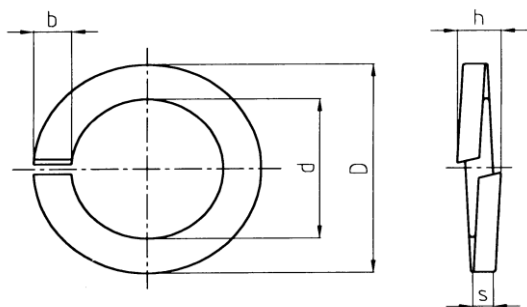

Single coiled washer

Rondella grower Federring

DIN 127 B KOMBI

CARBON STEEL C 60 EN 10016-2

DIMENSIONS AND FEATURES							PACKAGING		
For screws of	d min.-max.	D max.	b min.-max.	s min.-max.	h min.-max.	Kg/1000 pieces	No. of pcs standard packaging	No. of pcs bulk packaging	No. of pcs micro packaging
M 3.0	2.70-2.80	5.60	1.20-1.40	0.70-0.90	1.40-1.70	0.083		120000	
M 4.0	3.60-3.75	6.95	1.40-1.60	0.80-1.00	1.60-1.90	0.158		70000	
M 5.0	4.55-4.75	8.55	1.70-1.90	1.10-1.30	2.20-2.60	0.290		35000	
M 6.0	5.50-5.70	11.00	2.35-2.65	1.50-1.70	3.20-3.50	0.685		17000	
M 8.0	7.40-7.65	13.95	2.85-3.15	1.90-2.10	3.80-4.50	1.410		8000	
M 10.0	9.40-9.60	17.00	3.30-3.70	2.05-2.35	4.40-5.20	2.100		4000	
M 12.0	11.30-11.70	19.80	3.80-4.20	2.40-2.70	4.70-5.60	3.350		2500	

Dimensions in mm

Technical details:

Hardness: 430 - 530 Hv.

Tightening torques: see table.

Chemical analysis of raw material: see table.

Sorted out material to prevent the presence of foreign parts.

Anticorrosion surface treatment:

Dry and clean surface.

Features and specific use:

Washer to be used only for preassembling with metric pitch screws (for sems).

